



SolarEdge Home EV Charger

Installation Manual

Version 1.00

SolarEdge

**EV charger
Charging Station
Installation manual V 1.00a**

Translation of the original instructions

solar

Document: V 1.00a
Document No.:
Pages: 58

© SolarEdge Technologies

Customer Support
SolarEdge Technologies

<https://www.solaredge.com/service/support>

© KEBA 2021

Specifications are subject to change due to further technical developments. Details presented may be subject to correction.
All rights reserved.

KEBA Energy Automation GmbH

Reindlstraße 51, 4040 Linz, Austria, www.keba.com/emobility
☎ +43 732 7090-0, 📠 +43 732 7309-10, ✉ kecontact@keba.com

Table of contents

1	Introduction	5
1.1	Representation of safety instructions	6
1.2	Purpose of the document	6
1.3	Requirements	7
1.4	Intended use	7
1.5	Warranty	7
1.6	Notes on this document	8
1.7	Further documentation	9
2	Safety notes	10
3	Scope of delivery	12
4	Description of the charging station	14
4.1	Front view	14
4.2	Rear view	15
4.3	Top view	15
4.4	Type plate	16
4.5	Options	16
5	Displays and operating elements	18
5.1	LED bar	18
5.2	Display (optional)	18
6	Mounting and installation instructions	19
6.1	General criteria for the site selection	21
6.2	Space requirements	22
6.3	Required tools	22
6.4	Mounting the charging station	22
7	Connections and wiring	26
7.1	Connection overview	26
7.2	Required tools	27
7.3	Power supply	27
7.4	Enable input X1	32
7.5	Switch contact output X2	32
7.6	Ethernet connection X3 and X4 (optional)	33
8	Configuration	35
8.1	DIP switch settings	35

9	Commissioning	39
9.1	Activating/deactivating commissioning mode	39
9.2	Perform safety checks	40
9.3	Mount covers	41
9.4	Attach seal	42
10	Maintenance	44
10.1	Replacing the fuse	44
10.2	Troubleshooting	44
10.3	Software update.....	45
11	Support	46
12	Disposal	47
12.1	Disposal of the charging station.....	47
13	Technical data	48
13.1	General	48
13.2	Power supply	48
13.3	Socket / cable	49
13.4	Ambient conditions.....	49
13.5	Interfaces	50
13.6	Calibratable energy meter.....	50
13.7	Dimensions and weight.....	51
14	EU Directives and Standards	53
15	Declaration of conformity	54

1 Introduction

This manual is valid for SolarEdge Home EV Charger.

The pictured devices used in this manual are visual examples. The figures and explanations contained in this manual refer to a typical device design. The devices used by you may differ in their appearance.

We recommend always keeping the charging station updated to the most recent software version, as this contains functional enhancements and product improvements.

1.1 Representation of safety instructions

At various points in this manual, you will see notes and precautionary warnings regarding possible hazards. The symbols used have the following meaning:



DANGER!

indicates an imminently hazardous situation, which will result in death or serious bodily injury if the corresponding precautions are not taken.



WARNING!

indicates a potentially hazardous situation, which can result in death or serious bodily injury if the corresponding precautions are not taken.



CAUTION!

means that if the corresponding safety measures are not taken, a potentially hazardous situation can occur that may result in slight bodily injury.

Caution

means that damage to property can occur if the corresponding safety measures are not taken.



ESD

This symbol reminds you of the possible consequences of touching electrostatically sensitive components.

Information

Identifies practical tips and useful information. No information that warns about potentially dangerous or harmful functions is contained.

1.2 Purpose of the document

This document describes the complete installation of SolarEdge Home EV Charger.

This document is an extension of the supplied manuals for SolarEdge Home EV Charger.

You must comply with all instructions and safety notes in the supplied manuals!

1.3 Requirements

This document contains information for persons with the following requirements:

Target group	Required knowledge and abilities
Electrician	<p>Person who, due to his or her special training, expertise and experience as well as knowledge of current standards, is able to assess the work performed and the possible hazards.</p> <p>Knowledge of:</p> <ul style="list-style-type: none"> • current valid safety information, • the mode of operation of the charging station, • the displays and operating elements of the charging station, • basics of network technology, • diagnostic options, • systematic fault analysis and rectification, • the setting options on the charging station.

1.4 Intended use

The charging station is intended for charging electric vehicles (such as electric cars). The connection of other devices (such as power tools) is not allowed.

The charging station is suitable for indoor and outdoor use. The charging station has to be installed vertically on a wall or on a floor-mounted column. The surface for the installation must be flat and suitably stable (e.g. brick wall, concrete wall). The respective national regulations must be observed with regard to the installation and connection of the charging station.

The intended use of the device always includes the compliance with the environmental conditions for which this device was developed.

The charging station has been developed, manufactured, tested and documented in accordance with the appropriate safety standards. If the instructions and safety instructions described for the intended use are observed, the product will normally not pose a risk to the health of persons or damage to property.

Not observing the safety instructions can result in risk of death, injuries and damage to the device!

The device manufacturer assumes no liability for resulting claims!

1.5 Warranty

Only general maintenance work that is expressly permitted by SolarEdge Technologies may be performed. Any other tampering to the device will result in a loss of the warranty claim.

**WARNING!****Risk of electric shock and fire hazard!**

After the front part has been opened, product safety can no longer be guaranteed.

Only those covers that are described in the procedure instructions are allowed to be opened. If one of the covers is sealed by a lead seal, it is not permitted to be opened by unauthorized persons. If the lead seal is broken, the device loses its specific suitability for use and may no longer be put into operation due to the resulting incorrect identifier.

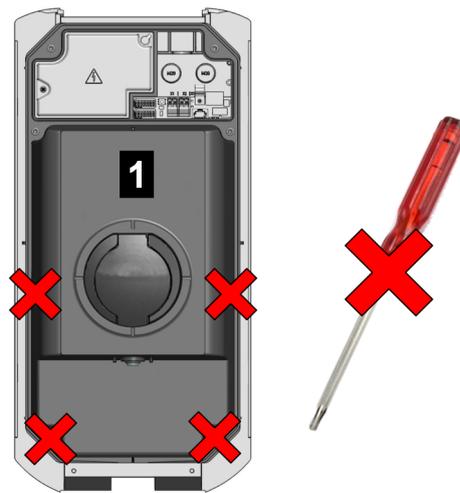


Fig. 1-1: Screws on the front part

The front part **1** must not be opened. Opening the front part (4 Torx screws) will break the manufacturer's seal and void the warranty claim. For a warranty claim, there is a duty of proof of the customer that the defect – which led to the defect of the device – already existed at the time of delivery. If the manufacturer's seal is broken, this proof can no longer be provided, resulting in expiration of the warranty claim.

A device with a broken manufacturer's seal or removed lead seal may no longer be put into operation. The necessary steps must be taken for having the charging station replaced or repaired by a specialist dealer or service partner.

1.6 Notes on this document

The manual is part of the product. It is to be retained over the entire life cycle of the product and should be forwarded to any subsequent owners or users of the product.

The instructions contained in this manual must be followed precisely. Failure to do so could result in the creation of potential sources of danger or the disabling of safety devices. Apart from the safety instructions given in this manual, the safety precautions and accident prevention measures appropriate to the situation in question must also be observed.

1.6.1 Contents of the document

- Description of the charging station
- Assembly of the charging station
- Electrical installation of the charging station
- Commissioning of the charging station
- Maintenance of the charging station

1.6.2 Not contained in this document

- Operation of the charging station
- Troubleshooting

1.7 Further documentation

Manuals and additional information are available on our website:
www.solaredge.com/resource-library

2 Safety notes



WARNING!

Risk of electric shock and fire hazard!

- Installation, commissioning, maintenance or retrofitting of the charging station must be performed by correctly trained, qualified and authorized electricians¹⁾ who are fully responsible for the compliance with existing standards and installation regulations.

Please observe that an additional overvoltage protection can be required by vehicles or national regulations.

Also note that some countries or vehicle manufacturers may require a different triggering characteristic of the residual current circuit breaker (Type B).

- Do not install or use a damaged device.
- A damaged charging station must be taken out of commission and repaired or replaced by a qualified and authorized electrician.
- A repair of the charging station is not permitted and may only be carried out by the manufacturer.
- No unauthorized conversion work and modifications may be made to the charging station.
- No markings (such as safety signs, warnings, wire markings, etc.) may be removed from the charging station.
- Never use faulty, worn-out or dirty charging plugs.
- Using cable lengthening sets is forbidden.
- Using adapters of any kind is forbidden.

¹⁾ Persons who, due to their special training, expertise and experience as well as knowledge of current standards, are able to assess the work performed and the possible hazards.

Caution**Possible damage to property!**

- When connecting and wiring the charging station, ensure that the connection area is clean so that no foreign objects (pieces of wire, etc.) get inside the charging station.
 - If protective films are present, they may only be removed after connecting the cables.
 - Pull the charging cable out of the plug holder only by the plug and not by the cable.
 - The charging cable may not be damaged mechanically (kinked, pinched or driven over) and the contact area is not allowed to come into contact with sources of heat, dirt or water.
 - Never clean the charging station with aggressive solvents and cleaning agents, abrasive materials, spray water (garden hose, high-pressure cleaner, etc.) or excessive pressure.
-

3 Scope of delivery

The following parts are included in the scope of delivery:

Basic elements

Description	e-series	b-series c-series x-series
Charging station	1x	1x
Cable holder (for versions with charging cable)	1x	1x
Installation and configuration instructions	1x	1x
Operating Instructions	1x	1x
Drilling template	1x	1x
Keys for cylinder lock (optional)	-	3x
RFID card (optional)	-	1x

Installation materials

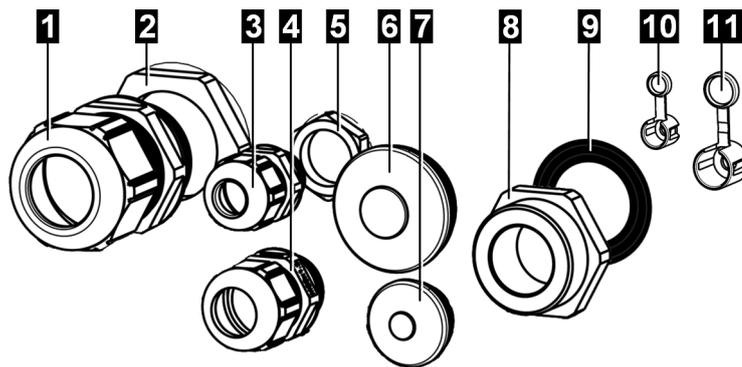


Fig. 3-2: Installation materials

No.	Description	Application	Clamping range	e-series	b-series, c-series, x-series,
1	Cable gland M32x1.5	Power supply line (top/behind cable installation)	12 – 22 mm	-	1x
2	Locknut M32x1.5		-	1x	1x
3	Cable gland M16x1.5	Data line (top/behind cable installation)	4 – 10 mm	-	1x
4	Cable gland M20	Power supply line (top/behind cable installation), in combination with reduction insert M32/M20 and seal ring	6 – 12 mm	1x	1x
5	Locknut M16x1.5		-	-	1x

No.	Description	Application	Clamping range	e-series	b-series, c-series, x-series,
6	Double-membrane seals M32	Power supply line (top/behind cable installation)	14 – 21 mm	1x	1x
7	Double-membrane seals M20	Data line (top/behind cable installation)	7 – 12 mm	-	1x
8	Reduction insert M32/M20		-	1x	1x
9	Seal ring for reduction insert	Between reduction insert and housing	-	-	1x
10	Sealing cap 1	Terminal cover	-	-	1x
11	Sealing cap 2	Connection panel cover	-	-	1x

Mounting set for wall installation

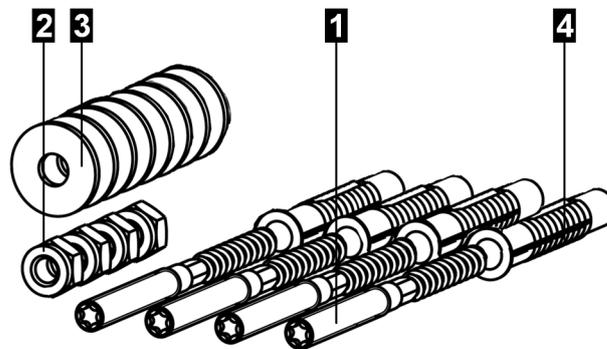


Fig. 3-3: Mounting set for wall installation

No	Description	e-series	b-series c-series x-series
1	Hangar bolts M8x100	-	4x
2	Nut ISO 10511 - M8	-	4x
3	Washer ISO 7089 - 8.4	-	8x
4	Anchors for M8; Fischer UXR-8	-	4x

4 Description of the charging station

4.1 Front view

Information

Depending on the design of the charging station, the charging socket or charging cable may deviate from the shape shown.

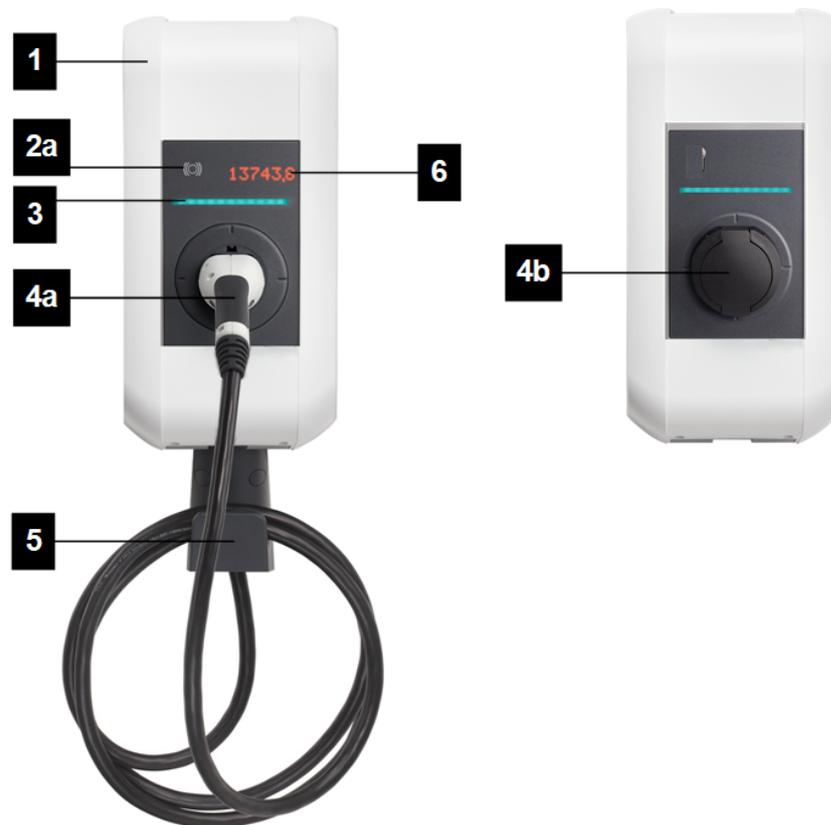


Fig. 4-4: Overview of charging station

1 ... Housing cover	2a ... RFID reader (optional)
3 ... LED bar	4a ... Permanently installed charging cable (optional)
4b ... Charging socket with cover (optional)	5 ... Holder for charging cable (optional)
6 ... Display (optional)	

4.2 Rear view

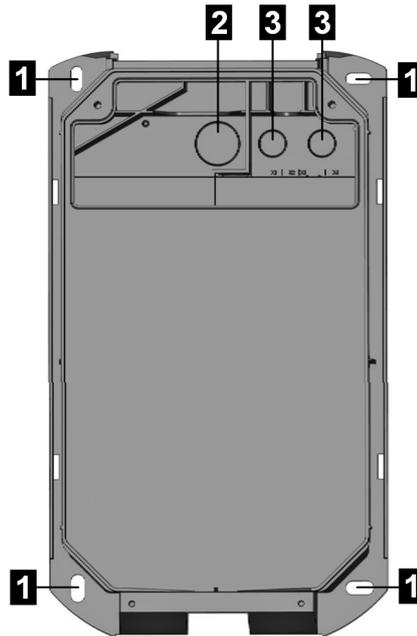


Fig. 4-5: Rear view

1 ... Mounting holes	2 ... Flush-mounting cable insertion openings M32 (for supply line)
3 ... Flush-mounting cable insertion openings M20 (for control line or Ethernet)	

4.3 Top view

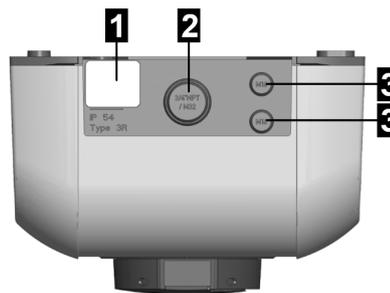


Fig. 4-6: Top view

1 ... Type plate	2 ... Surface-mounting cable insertion openings M32 (for supply line)
3 ... Surface-mounting cable insertion openings M16 (for control line or Ethernet)	

4.4 Type plate

The type plate is located at the top of the charging station. The illustration below shows all the information that can be found on the type plate. The actual size of the type plate may differ depending on the device variant.

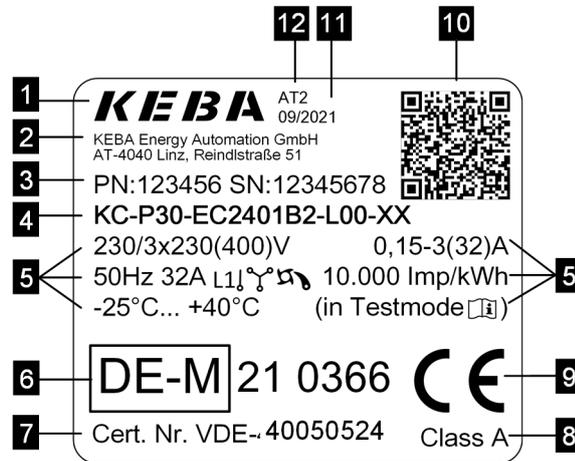


Fig. 4-7: Type plate (example)

1 ... Manufacturer	2 ... Manufacturer address
3 ... PN: Material number SN: Serial number	4 ... Product designation
5 ... Technical data	6 ... Marking of the approval
7 ... Type examination number	8 ... Accuracy class in accordance with EN 50470-1, -3
9 ... CE marking	10 ... Public key information
11 ... Production date	12 ... Production site

4.5 Options

This chapter lists the possible options of the charging station.

4.5.1 RFID

The RFID reader is used for the non-contact authorization of a charging process with MIFARE cards or tags according to ISO 14443 and ISO 15693.



Fig. 4-8: RFID

1 ... RFID reader	
--------------------------	--

5 Displays and operating elements

5.1 LED bar



Fig. 5-9: Segments of the LED bar

The LED bar provides visual information about the current operating status of the charging station. It consists of 4 segments (S1 to S4), which can light up or flash, together or individually, in various colors.

The LED bar is only visible with activated power supply.

5.2 Display (optional)

Devices with energy meters (Home EV-Charger c-series and x-series) have a (dot matrix LED) display.

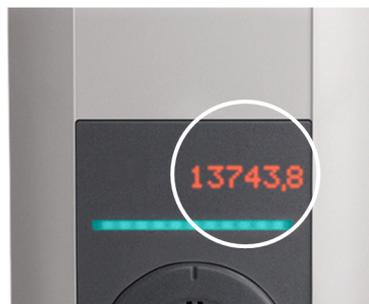


Fig. 5-10: Display

The display may show different information depending on the operating status (e.g., software version, IP address, authorization request). The main task, however, is to display the status of the internal energy meter. During periods of inactivity, the display brightness is reduced and switched off after a few minutes.

The display lights up through the housing and is only visible when the power supply is active.

6 Mounting and installation instructions

The charging station must be installed vertically against a wall or floor-mounted column.

Depending on the scope of delivery, a mounting set for wall mounting is available. The mounting set is suitable for cement, brick and wood (without anchors). For other surfaces, a suitable method of installation must be selected.

Depending on the device model and/or use of special materials, the installation materials must be provided by the customer. Proper installation is absolutely necessary and lies outside of the scope of responsibility of the manufacturer.



WARNING!

Risk of electric shock and fire hazard!

For installation on hollow walls, at least two mounting screws must be secured to a support element of the wall. Special hollow-wall anchors must be used for the other mounting screws. It is particularly important to make sure the substructure has sufficient load-bearing capacity.

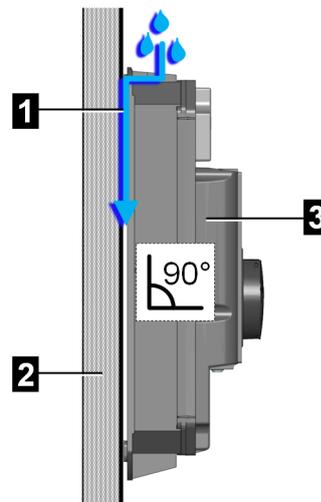


Fig. 6-11: Water drainage

1 ... Water drainage	2 ... Wall or floor-mounted column
3 ... Charging station	

Caution

Property damage due to dampness and moisture!

- The charging station must be installed and commissioned in a suitable environment. The charging station must be protected against rain, snow and dirt during the process. During an outdoor installation, the connection panel cover must not be opened when it is raining, windy, snowing, etc.
- Only a vertical installation of the charging station is permitted. The charging station must be mounted perpendicular to the mounting surface with the supplied washers—no inclination is allowed, otherwise water drainage will not be possible and that will result in damage to the device (see illustration above).
- The joints between the wall/floor-mounted column and the charging station must not be sealed with silicone. Water must be able to drain off behind the charging station (see illustration above). If water drainage is not possible, this will result in damage to the device.
- Do not subject the charging station to high humidity for an extended period of time.
- If a cold charging station is brought into a significantly warmer environment (e.g. after a long transport in a cold environment), condensation may form in the device.
Before connecting the charging station to the power supply, you must wait until the temperature of the charging station is the same as the room temperature and the moisture has evaporated again.
- Installation of the charging station is permitted only against a wall or floor-mounted column. The back side of the charging station has culverts through which condensation can escape to the outside. To ensure that no splash water can get into the device through the culverts, the back side of the charging station must be entirely protected.
- The charging station must always be fully and properly equipped with the supplied cable glands. Unused cable insertion openings must be screwed shut with blind plugs to ensure the necessary leak tightness.

Caution

Risk of breaking the plastic housing!

- Countersunk screws must not be used for the mounting.
 - Four of the supplied washers must be used under the nuts.
 - Do not tighten the mounting screws with force.
 - The mounting surface must be completely flat. Warpage of the housing must be prevented.
 - If adjustment is necessary, the 4 remaining supplied washers must be used.
-

6.1 General criteria for the site selection

The charging station was constructed for the indoor and outdoor area. Accordingly, it is necessary to ensure the correct set-up requirements and the protection of the device at the installation site.

The following criteria must be taken into account when selecting a location:

- Take into account the local electrical installation regulations, fire prevention measures and accident prevention regulations as well as emergency routes at this site.
- The charging station may not be installed in potentially explosive atmospheres (EX environment).
- The charging station may only be installed in stationary applications.
- Mount the charging station so that it is not located in the direct flow of passersby and so that no one can trip over connected charging cables and so that the charging cables do not cover or cross passing pedestrian and motorized traffic.
- Do not install the charging station at locations where it is exposed to ammonia or ammonia gas (e.g. in or at stables).
- The mounting surface must be sufficiently stable in order to withstand the mechanical forces.
- Do not install the charging station at locations where falling objects could damage the device (e.g. hung up ladders or automobile tires).
- The device must not be exposed to direct spray water (e.g. neighboring manual car wash facility, high-pressure cleaner, garden hose).
- The device should be protected against direct rain as far as possible to prevent icing, hail damage or similar.
- If possible, the device should be mounted protected from direct sunlight. Otherwise, (e.g. set up outside at a parking space) the charging current specification will be reduced to 16 A if the maximum permitted temperature is exceeded. The charging process can also subsequently be switched off.
- Observe the permissible environmental conditions (see "Technical data").

Observe the internationally valid installation standards (e.g. IEC 60364-1 and IEC 60364-5-52) and comply with the nationally applicable installation standards and regulations.

6.2 Space requirements

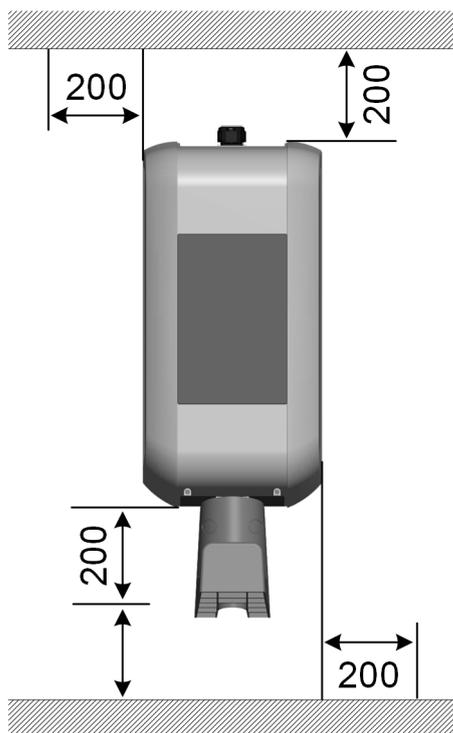


Fig. 6-12: Space requirement, specified in mm

If several charging stations are installed adjacent to each other, a distance of at least 200 mm between charging stations must be complied with.

Information

We recommend mounting the charging station (height of the charging socket) at a height of 1.2 m. Observe that national regulations can limit this height.

6.3 Required tools


The following tools are required for the installation:

- Drill suitable for subsurface with diameter 10 mm
- Screwdriver/bit T25
- Socket wrench 13 mm


6.4 Mounting the charging station

The charging station must be prepared for this before mounting. To do this, proceed as follows:


- 1) Unscrew the two screws on the bottom side of the housing cover.




- 2) Lift the housing cover at bottom max. 1 cm (1) and then push upwards (2).



- 3) Loosen the four screws of the connection panel cover and remove the connection panel cover upwards.



- 4) Loosen the two screws of the terminal cover and remove the terminal cover upwards.

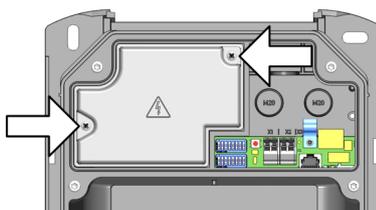

- 5) Place the charging station on a stable surface.
- 6) Using a hammer and flat-head screwdriver, gently knock out the required cable insertion openings (Surface-mounting cable installation: Cable insertion openings on the top side / Flush-mounting cable installation: Cable insertion openings on the back side)
- 7) Insert the cable glands (surface-mounted cable installation) or double-membrane seals (flush-mounted cable installation) into the corresponding cable insertion openings.

The charging station is now ready for installation.

To mount the charging station, proceed as follows:

- 1) Mark the 4 holes (1) in the designated location on the wall. The supplied drilling template can be used for this purpose


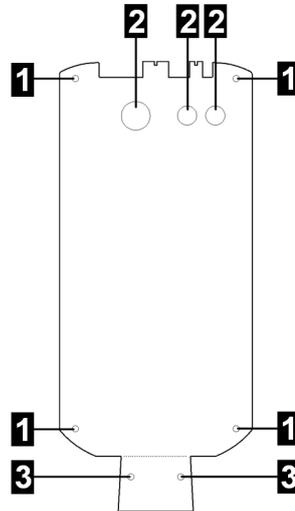


Fig. 6-13: Drilling template

1 ... Mounting holes	2 ... Cable insertion openings
3 ... Cable holder holes	

- 2) If there is a cable holder, mark the cable holder holes (3).
- 3) Drill boreholes and, if necessary, insert anchors in the holes.

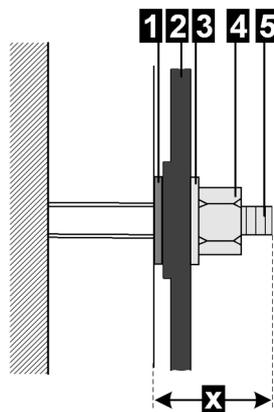

1 ... Washer for adjusting	2 ... Rear wall of the charging station
3 ... Washer for nut	4 ... Nut
5 ... Hanger bolt	x ... 20 mm

- 4) Turn the hanger bolts into the hole / anchors until the thread still protrudes approx. 20 mm (x).
- 5) Pull the cable through the prepared openings on the charging station.

- 6) Tighten the cable gland from the back of the charging station. Pay attention to leak tightness!

Information

The cable gland must be tightened before wall mounting, as it is not possible to screw it on afterwards.



Fig. 6-14: Tighten the cable gland from the back

- 7) Insert the supply line so far into the cable gland that the cable sheath is visible in the connection area.
- 8) 4 of the supplied washers can be used to compensate for any unevenness and to ensure proper water flow behind the device: If necessary, place the washers (1) on the hanger bolts.
- 9) Position the charging station on the wall and secure it with the 4 washers (3) and nuts (4) to the hanger bolts (5).

The charging station is now mounted on the wall and ready for cabling.

7 Connections and wiring

7.1 Connection overview

The following illustration shows a connection overview with the covers open.

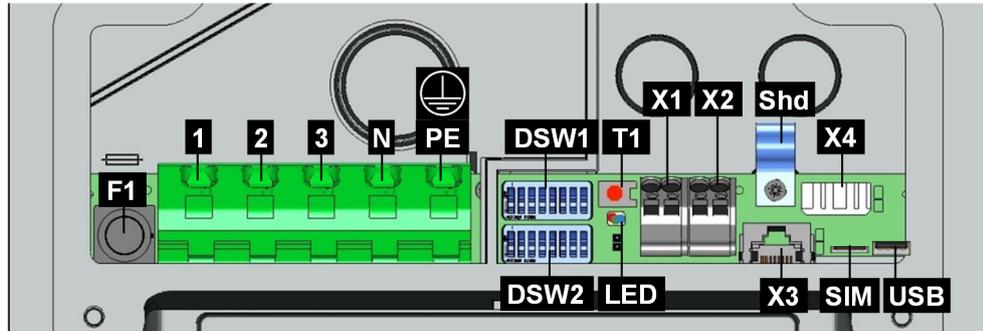


Fig. 7-15: Connection overview

F1 ... Fuse holder	1 ... Power connection phase conductor 1
2 ... Power connection phase conductor 2	3 ... Power connection phase conductor 3
N ... Power connection neutral conductor	PE ... Power connection grounding conductor
DSW1 ... DIP switch	DSW2 ... DIP switch
T1 ... Service button	LED ... Status LED
X1 ... Enable input	X2 ... Switch contact output
Shd ... Shield clamp (ground for ETH)	X3 ... Ethernet2 connection (RJ45)
X4 ... Ethernet1 connection (LSA+® terminals)	SIM ... SIM card slot (optional)
USB ... USB interface	

**WARNING!****Risk of electric shock and fire hazard!**

- For terminals X1-X4 (Ethernet connections as well as terminals for enabling input and switching contact output), only voltages and circuits are permitted to be connected which have a safe separation to dangerous voltages (for example sufficient insulation).
Supply the terminal for the switching contact output (X2) exclusively from voltage sources which have a protective extra-low voltage.
- The fuse on the fuse holder F1 must not be used to switch off the charging station. To interrupt the power supply, always use the circuit line breaker.
- The connection panel is never permitted to be left open unattended. Before leaving the charging station, the connection panel cover must be mounted.

7.2 Required tools

The following tools are required for the electrical installation:

- Flathead screwdriver for supply terminals (blade width 5.5 mm)
- Flathead screwdriver for terminals X1/X2 (blade width 3.0 mm)
- Phillips head screwdriver PH2
- Mounting tools for cable screw connections M16 (width across flats 20 mm) and M32 (width across flats 36 mm)
- LSA+[®] insertion tool (optional)

7.3 Power supply

The power supply (supply line) must be hardwired to an existing domestic installation and comply with the applicable national regulations.

Mains disconnecter

The charging station does not have its own power switch. The line circuit breaker of the supply line serves as a mains disconnecter.

Selection of RCD / fault-current circuit breaker

Each charging station must be connected via a separate RCD (Residual Current Device / fault-current circuit breaker). No other consumers may be connected to this circuit.

An RCD with at least Type A must be used since all Home EV-Charger variants have an internal DC fault current monitoring ≥ 6 mA.

During installation, other important issues such as "cascading" of RCD and selection of a suitable line circuit breaker must be considered.

Dimensioning of the line circuit breaker

When dimensioning the line circuit breaker, the increased ambient temperatures in the control cabinet must also be taken into account! Under certain circumstances, this can make a reduction of the charging current specification necessary in order to increase the system availability.

The nominal current must be determined in accordance with the type plate data in coordination with the desired charging power (DIP switch settings for charging current specification) and the supply line.

$$I_{(\text{DIP switch})} \leq I_{(\text{circuit breaker})} \leq I_{(\text{supply line})} \leq I_{(\text{nominal current})}$$


Dimensioning of the power supply line

When dimensioning the power supply line also observe the possible reduction factors and the increased environmental temperatures inside the connection area of the charging station (see temperature rating of the supply terminals)! Under certain circumstances, this can lead to an increase of the cable cross-section and to the adaptation of the temperature resistance of the power supply line.


7.3.1 Cable installation

Note the following points during cable installation:

- The surface-mounted cable mounting must always be carried out before the wall installation, as it is not possible to completely screw down the cable gland afterwards.
- The supply line must be sufficiently inserted into the cable gland (surface-mounted cable installation) or the double-membrane seals (flush-mounted cable installation) so that the cable sheath **1** is visible in the connection area. Care must be taken to ensure that the diameter of the cable gland matches the diameter of the cable in order to guarantee tightness.

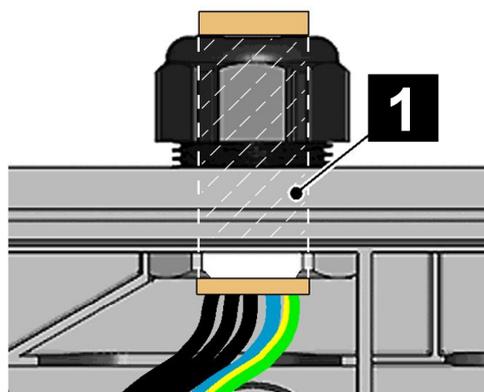

Correct cable gland (surface-mounted cable installation)

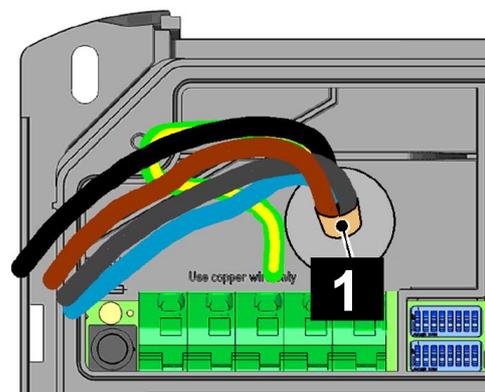

Double-membrane seals (flush-mounted cable installation)

- The double-membrane seals must fit cleanly against the cable sheathing.
- Make sure that the connection cables are inserted centered, straight and without pressure through the double-membrane seals to ensure seal tightness.
- The installation pipe or cable conduit with the feed line may not be screwed together in the cable gland (above) or run through the double-membrane seals (behind).
- The supply line must be routed straight through the cable gland resp. the double-membrane seals in compliance with the bending radii (approx. cable diameter times 10).
- For surface-mounted cable installation, the cable gland must be installed properly and screwed sufficiently tightly from the rear of the charging station, otherwise water may enter.

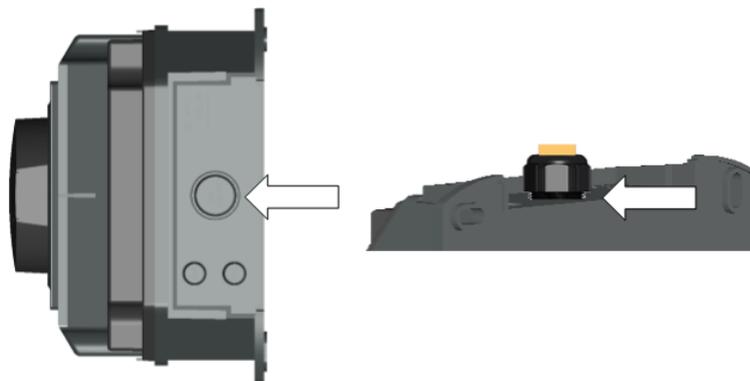


Fig. 7-16: Screwing from the rear

Possible cable glands (surface-mounted)

When using the M32 fitting, no additional sealing ring is necessary, as this fitting already has an integrated sealing ring.

When using a reducing insert (M32->M20), the enclosed sealing rings must be used.


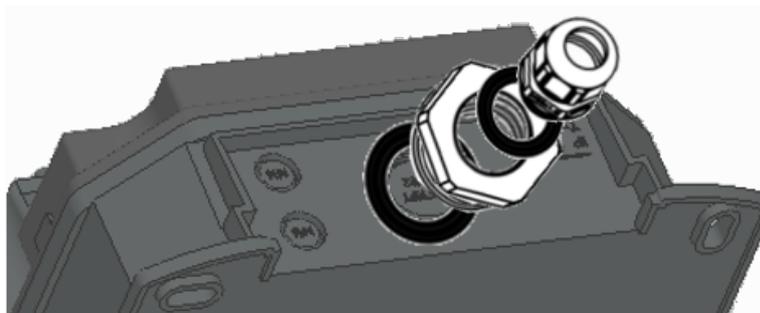


Fig. 7-17: Use of a reducing insert

7.3.2 Connecting the voltage supply

The charging station can be connected in the following ways:

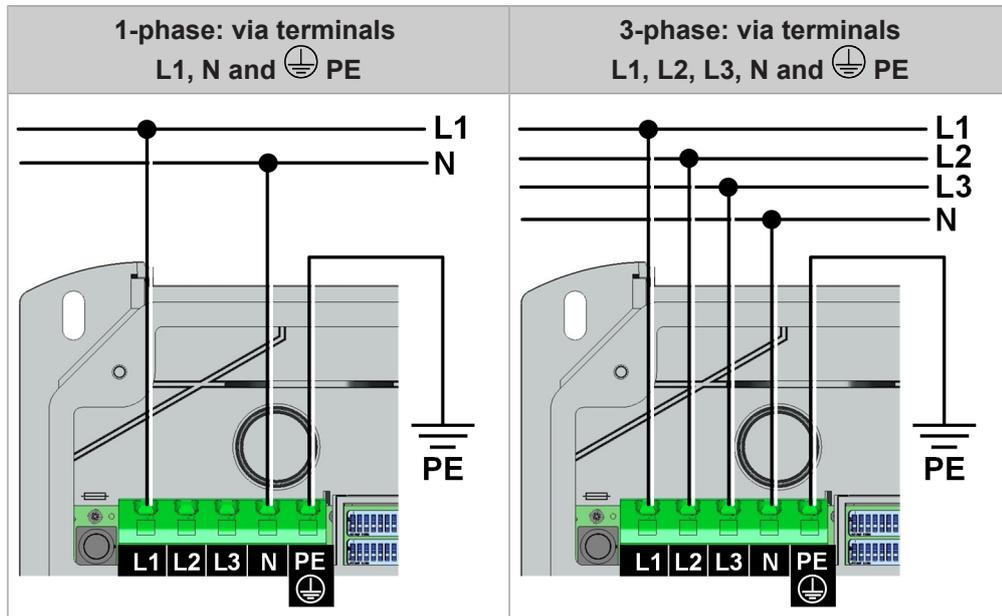

The supply terminals are designed as spring-type terminals. The handling instructions enclosed in the terminal area must be observed.


Caution

Risk of breaking the terminal!


Do not press the screwdriver up, down or to the side!

To connect the supply voltage, proceed as follows:


- 1) Shorten the connection wires to the appropriate length (as short as possible). The protective conductor \oplus PE must be longer than the other conductors!

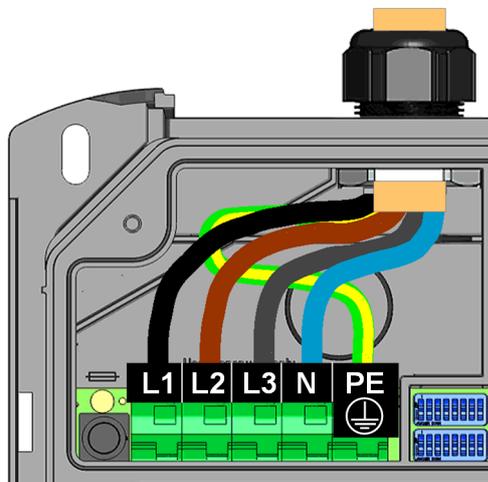

- 2) Strip the connection wires to approx. 12 mm. For stranded wires with fine wires, use wire end sleeves.
- 3) Insert the flat-head screwdriver (5.5 mm) into the supply terminal as shown. The screwdriver must rest on the housing.

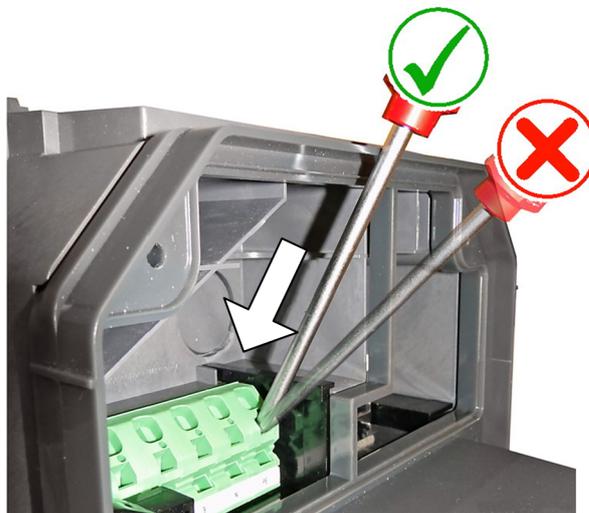

- 4) Press the screwdriver straight into the terminal until the contact opens completely. The angle of the screwdriver changes while pressing in.
- 5) Insert connection wire into the designated terminal opening.

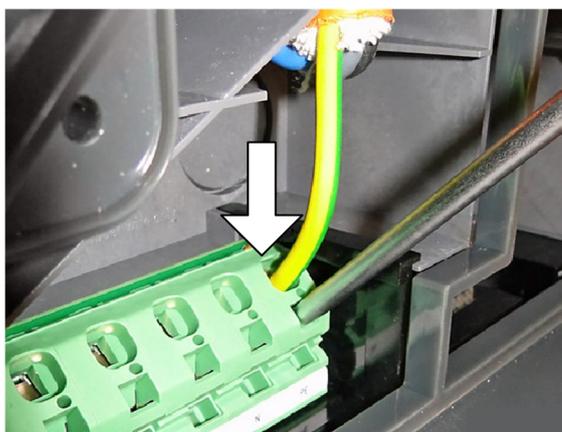

- 6) Pull out the screwdriver straight.
- 7) Repeat these steps for the other connection wires.

The charging station is connected to the power supply.

The charging station is set to 10 A in the delivery state. In order to adapt the maximum current to the installed line circuit breaker, a configuration via the DIP switches is necessary. For details, see [8.1 DIP switch settings](#).

7.3.3 Electrical connection to special systems of AC power supply

Information

The charging station can in principle be connected to TN, TT and IT systems of AC power supply networks. Pay attention to the restrictions of your vehicle manufacturer.

We recommend connecting the charging station in delta networks without upstream transformer only with single phase. A three-phase connection in delta networks should only take place with an upstream transformer ("triangle-to-star converter").

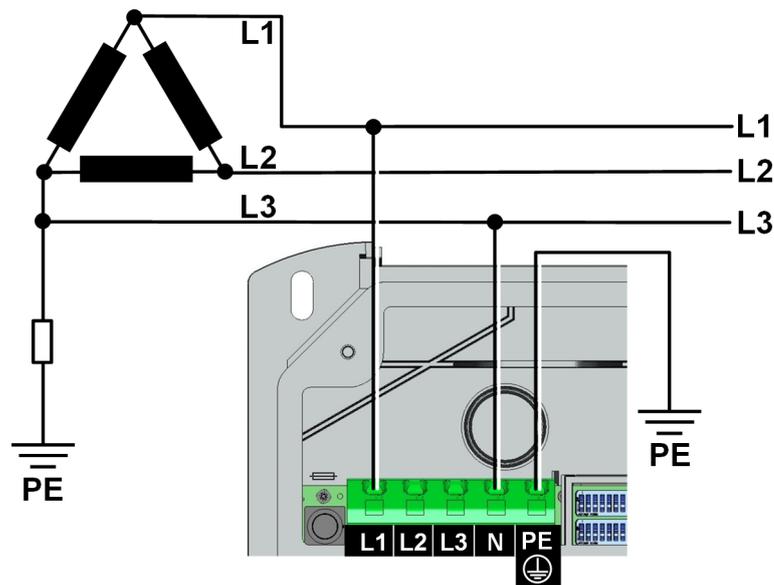


Fig. 7-18: Connection to a three-wire IT system with 230 V

7.4 Enable input X1

Information

This function is not available.

7.5 Switch contact output X2

Information

This function is not available.

7.6 Ethernet connection X3 and X4 (optional)



WARNING!

Danger from compensation currents on shielding!

Compensation currents flowing through shielding in extended systems can lead to damage to the interfaces and hazards when working on the data lines.

Any measures (such as connecting to a shared distribution board, expanding a TN-S network, etc.) should be discussed with the person responsible for building services.


Information

The Ethernet1 connector X4 (LSA+®) and the Ethernet2 connector X3 (RJ45) are connected in parallel on the PCB and cannot be used at the same time. The unused connection must be disconnected if necessary (e.g. during servicing).

The Ethernet1 connection X4 is designed as a terminal block in LSA+® technology. It is recommended to implement hard-wired communication (e.g. for SmartHome or a charging network) at the LSA+® connection.

Color coding

According to the cabling standards used in the building, the contacts are wired according to **TIA-568A/B** for 100BaseT as follows:

Pin	-568A Pair	-568B Pair	-568A Color	-568B Color
1 (Tx+)	3	2	 white/green stripe	 white/orange stripe
2 (Tx-)	3	2	 green/white stripe or green	 orange/white stripe or orange
3 (Rx+)	2	3	 white/orange stripe	 white/green stripe
4 (Rx-)	2	3	 orange/white stripe or orange	 green/white stripe or green

Terminal data


Category	Wire diameter	Insulation diameter
Inflexible cable Cat 5e / Cat6 STP	0.36 mm (AWG 27)	0.7 – 0.75 mm
	0.4 – 0.64 mm (AWG 26 – AWG 22)	0.7 – 1.4 mm
Cat 6 STP	0.51 – 0.81 mm (AWG 24 – AWG 20)	1.0 – 1.4 mm

Category	Wire diameter	Insulation diameter
Flexible cable Cat 5e / Cat 6 STP	7 x 0.2 mm (AWG 24)	1.1 – 1.4 mm

Preparing the connection cable

To prepare the connection cable, proceed as follows:


- 1) Strip the connection cable about 6 cm.
- 2) Knock back approx. 1 cm of shielding all over and wrap with conductive textile adhesive tape.

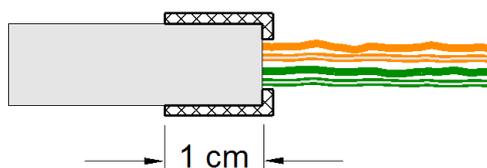

Connecting the cable

To connect the cable, proceed as follows:

- 1) Fix the connecting cable at the point of the wrapped-around shielding braid in the shield clamp **[K]**.
- 2) Tighten the shield clamp.
- 3) Clamp the wires to the terminal block **[ETH]** using an insertion tool.

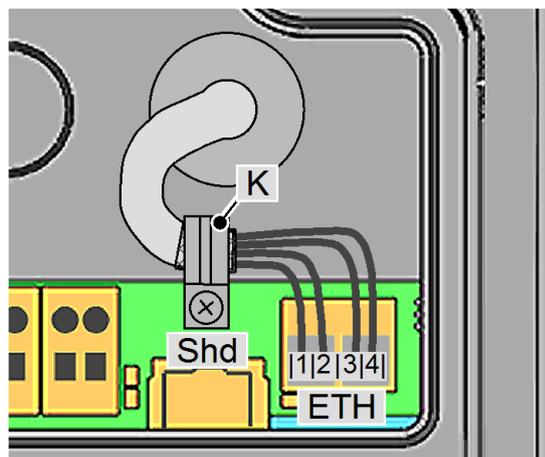

8 Configuration

The basic configuration of the charging station is done using the DIP switches.

8.1 DIP switch settings


Caution

Possible damage to the DIP switches!

The DIP switches are rocker switches and not slider switches. The DIP switches must be pressed and must never be slid.

ON/OFF position of the rocker switches

The illustration shows the position of the rocker switches for the setting ON and OFF

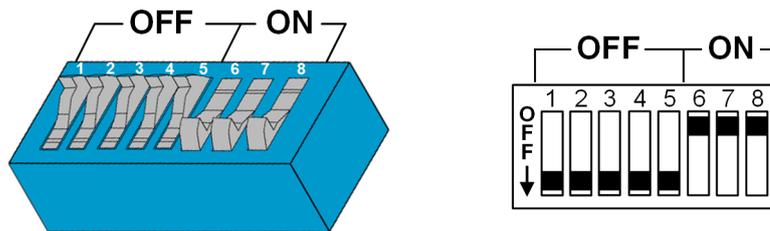

Information

Changes to the DIP switch settings only become effective after a restart of the charging station!

To restart, press the "Service button" until the first beep (approx. 1 second) or switch off the charging station for a short time via the line circuit breaker.

In the following tables, only the affected DIP switches are shown in the illustrations, others are not shown.

Control functions - DSW1

DIP switch	Function	Illustration
DSW1.1	Using the external enable input X1 for starting a charging process. DSW1.1 ON: Charging enabled when X1 is closed. Whether charging is enabled also depends on the RFID authorization. For details, see Enable input X1 (except e-series).	

DIP switch	Function	Illustration
DSW1.2	Switching the function of the switching contact output X2. DSW1.2 ON: X2 as contactor monitoring DSW1.2 OFF: X2 as charging status indicator For details, see Switch contact output X2 (excluding e-series).	
DSW1.3	Activate UDP or Modbus TCP as communication protocol. Only available for Home EV-Charger c-series und x-series. For details, see "UDP Programmer's Guide" or "Modbus TCP Programmers Guide".	





Avoiding asymmetrical loads - DSW1.4 and DSW1.5

DIP switch	Function	Illustration
DSW1.4 DSW1.5	Only valid for Home EV-Charger c-series. If communication is activated in the charging network (DSW2.5 = ON) or the wallbox is being operated as a slave, this setting is not possible. DSW1.4 = OFF DSW1.5 = OFF = Charging at full power for 1- or 2-phase chargers DSW1.4 = ON DSW1.5 = OFF = value: max. 16A DSW1.4 = OFF DSW1.5 = ON = value: max. 20A	 Example: Symmetric charging, max. 16 A


Setting the amperage - DSW1.6 to DSW1.8

Information
Only one maximum value, which is less than or equal to the operating current according to the type plate, can be set with the DIP switches.


DIP switch	Amperage	Illustration
DSW1.6 DSW1.7 DSW1.8	10 A	
DSW1.6 DSW1.7 DSW1.8	13 A	

DIP switch	Amperage	Illustration
DSW1.6 DSW1.7 DSW1.8	16 A	
DSW1.6 DSW1.7 DSW1.8	20 A	
DSW1.6 DSW1.7 DSW1.8	25 A	
DSW1.6 DSW1.7 DSW1.8	32 A	


Get IP address via DHCP server - DSW2.1 to DSW2.4

DIP switch	Function	Illustration
DSW2.1 DSW2.2 DSW2.3 DSW2.4	<p>Not valid for Home EV-Charger x-series.</p> <p>By default, the charging process is carried out independently by the charging station without a higher-level control system.</p> <p>The charging station attempts to obtain an IP address via a DHCP server, if needed. This also corresponds to the basic settings for charging stations without a network connection.</p>	


Setting fixed IP address - DSW2.1 to DSW2.4

DIP switch	Function	Illustration
<p>DSW2.1 DSW2.2 DSW2.3 DSW2.4</p>	<p>Not valid for Home EV-Charger x-series.</p> <p>If there are multiple charging stations in a network, the charging stations must be assigned an address.</p> <p>The last two digits of the IP address (192.168.25.xx) can be specified with the DIP switches DSW2.1 to DSW2.4. Each DIP switch has a specific value when it is set to "ON". A DIP switch set to "OFF" has the value 0.</p> <p>DSW2.1 = ON = value: 1 DSW2.2 = ON = value: 2 DSW2.3 = ON = value: 4 DSW2.4 = ON = value: 8</p> <p>The address is obtained by adding the values of the DIP switches and increasing the result by 10: Sum of the DIP switch values + 10 Thus, the addresses 11 bis 25 can be set.</p>	 <p>Example of IP address xxx.xxx.xx.21</p> <p>DSW2.1 = ON = 1 DSW2.2 = ON = 2 DSW2.3 = OFF = 0 DSW2.4 = ON = 8</p> <p>Address = 1 + 2 + 0 + 8 + 10 = 21</p>


Activation of communication - DSW2.5

DIP switch	Function	Illustration
<p>DSW2.5</p>	<p>Activation of communication in the charging network.</p> <p>This DIP switch setting must be made for each master and client charging station to enable charging station communication.</p>	

Commissioning mode - DSW2.8

DIP switch	Function	Illustration
<p>DSW2.8</p>	<p>Activate commissioning mode.</p> <p>For details, see 9.1 Activating/deactivating commissioning mode.</p>	

Current limitation using the enable input X1 - DSW2.6

DIP switch	Function	Illustration
<p>DSW2.6</p>	<p>Not valid for Home EV-Charger e-series.</p> <p>When the enable contact X1 is opened or closed, the available charging current is reduced to a certain value.</p> <p>The enable input X1 must be activated (DSW1.1 = ON).</p> <p>DSW2.6 = OFF = value: 0A DSW2.6 = ON = value: 8A</p>	 <p>Example: Current limitation on, 8 A</p>

9 Commissioning

The inspections and tests to be performed on the electrical connections and the correct functioning up to the acceptance of the charging station (in accordance with the locally applicable directives and laws) may only be carried out by a qualified electrician.

The following work must be carried out at the start of commissioning:

- Remove all residual installation and connection materials from the connection area.
- Check all screw and clamp connections for tightness.
- Check that all unused cable screw connections are properly sealed with blind plugs or dummy screw fittings.
- Switch on the voltage of the supply line. After 15-20 seconds, the LED bar should flash slowly blue or green. This indicates that the self-test, which is performed automatically at each startup, was successful.

The following steps are necessary during the initial commissioning:

- Activate commissioning mode
- Perform safety checks
- Deactivate commissioning mode
- Mount covers
- Attach seal

9.1 Activating/deactivating commissioning mode

The charging station can be put into a special commissioning mode to help facilitate the system inspection. The device carries out an extended self-test (interlocking, contactor control, current measurement, ...). Furthermore, the contactor is switched on with a time limit, to facilitate initial testing in this mode, even without a vehicle being plugged in. The charging socket is locked to prevent a cable from being plugged in.

A normal charging process is not possible in commissioning mode.

Information

For safety reasons, the commissioning mode is indicated on the charging station by an orange display on segment S3 of the LED bar (-/-/orange/-).

Activate commissioning mode

To activate the charging station commissioning mode, proceed as follows:

- 1) Set DIP switch DSW2.8 to ON (see [8.1 DIP switch settings](#)).
- 2) Restart the charging station by pressing the "Service button" until the first beep (approx. 1 second).

Commissioning mode is activated as soon as the LED bar lights up orange. You now have approx. 10 minutes to perform the required inspections and acceptance tests. The contactor is then deactivated and the charging station goes into an error state. This is indicated by the LED bar (white/red/red/red). By restarting via the "Service button", the commissioning mode can be reactivated.

Information

The energy in commissioning mode is taken into account when displaying the total energy. During the commissioning mode, the display is displayed in "watt-hours" (Wh).

Deactivate commissioning mode

In order to be able to operate the charging station properly, the commissioning mode must be deactivated again. To do this, proceed as follows:

- 1) Set DIP switch DSW2.8 to OFF (see [8.1 DIP switch settings](#)).
- 2) Restart the charging station by pressing the "Service button" until the first beep (approx. 1 second).

The charging station starts up again in normal mode and is ready for operation.

9.2 Perform safety checks

Before commissioning, check the effectiveness of the safety measure(s) of the system according to the nationally applicable regulations.

Electrical systems or devices must be checked by the installer of the system or device before commissioning. This also applies for the expansion or modification of existing systems or electrical devices. It is essential that all conditions for the safety measures are observed.

For example, the following points are to be taken into account:

- The checks (continuity of the connections of the protective conductor, insulation resistance, RCD (FI) triggering current, triggering time, etc.) are to be performed.
- The measurement devices must comply with the national regulations!
- The measurement results are to be documented. A test report is to be created and saved before the check.

Information

The tripping characteristics of the internal DC residual current monitoring is based on the product-specific standard IEC 62955. According to this standard, a trigger delay of up to 10 seconds is permitted. This circumstance may result in a negative evaluation for conventional test settings for type B residual current circuit breakers. Here, special test settings are to be used for EVSE (Electric Vehicle Supply Equipment).

9.3 Mount covers

In order to operate the charging station correctly, all covers must be inserted and screwed tight. If necessary, a seal can be attached.

Caution


For correct installation of devices with a calibratable energy meter, the charge point operator must apply a lead seal.

For devices with MID approval, at least the terminal cover must be secured with a lead seal.


For devices with national approval, the connection panel cover must be secured with a lead seal.

To mount all covers, proceed as follows:



- 1) Insert terminal cover and tighten with 2 screws.
If necessary, the right upper screw can be provided with the supplied sealing cap (see [9.4 Attach seal](#)).

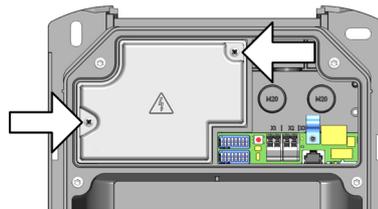


- 2) Insert connection panel cover and tighten with four screws to 2 Nm. The tabs on the connection panel cover must be flush with the enclosing housing. Only then will the device be properly sealed.
If necessary, the right upper screw can be provided with the supplied sealing cap (see [9.4 Attach seal](#)).



- 3) Hook in the housing cover at the top **1** and close it at the bottom **2**. The housing cover must glide into the guides without considerable resistance. The housing cover must be correctly seated in the housing guide on all sides.

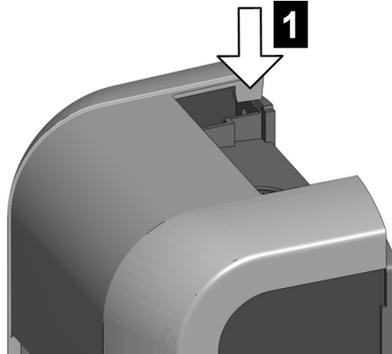

- 4) Secure the housing cover with two screws at the bottom.



All covers are mounted and the charging station is ready for use.


9.4 Attach seal

Depending on the scope of delivery, devices are available for sealing the terminal cover and the connection panel cover. If required, these can be used to prevent or identify tampering attempts by unauthorized persons at charging stations with preconfiguration or special suitability (MID calibration validity).

To attach the seals, proceed as follows:

- 1) If necessary, open the covers of the charging station until the cover to be sealed is accessible.
- 2) Loosen the right upper screw of the cover to be sealed.

- 3) Insert the screw into the sealing cap.



- 4) Screw the screw with the sealing cap back into the cover.
- 5) Close the cover of the sealing cap.



- 6) Thread the sealing wire through the opening of the sealing cap over the screw and place the seal.

The seal is attached. If necessary, reinstall all other covers of the charging station.


10 Maintenance

10.1 Replacing the fuse

Fuse	Current / Voltage	Type	Dimensions
F1	6.3 A / 250 V	Delay with high breaking capacity (>1500A) (T) (H)	5 x 20 mm fuse

To replace the fuse, proceed as follows:

- 1) Switch off the supply voltage of the charging station.
- 2) Remove the housing cover, the connection panel cover, and the terminal cover.
If there is a seal on the connection panel cover or terminal cover, it may only be removed by an authorized person! After changing the fuse, the seal must be replaced.
- 3) Using a screwdriver, press into the opening of the fuse holder.
- 4) Screw the fuse holder counterclockwise until it springs forward automatically by the spring.

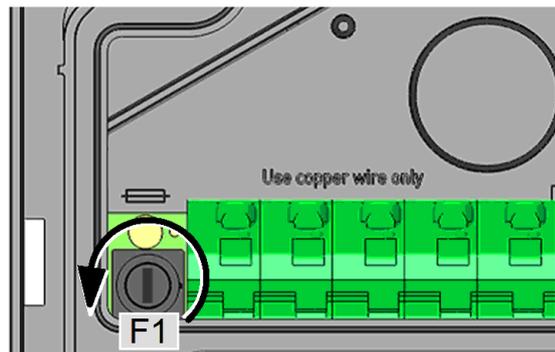

- 5) Replace the fuse.
 - 6) Press the fuse holder in and tighten clockwise.
 - 7) Mount the housing covers on the charging station again.
- The fuse has now been replaced.

10.2 Troubleshooting

Further information (e.g. operating and configuration instructions) and contact details are available on our website:

www.solaredge.com/resource-library

10.3 Software update

It is recommended to always keep the charging station up-to-date, as it contains functional enhancements and bug fixes. For software update ask SolarEdge Technologies.

The information and instructions for the current software package from the associated release notes must also be observed.

The instructions for updating the software on Home EV-Charger via USB or the network connection are contained in the *.zip file. For the Home EV-Charger x-series, the configuration manual must also be observed.

Information

A software update process on the charging station is indicated by the LED bar slowly flashing orange.

11 Support

If you have technical problems concerning SolarEdge products, please contact us:

<https://www.solaredge.com/service/support>

Before contact, make sure to have the following information at hand:

- Model and serial number of the product in question.
- The error indicated on the product SetApp mobile application or on the monitoring platform or by the LEDs, if there is such an indication.
- System configuration information, including the type and number of modules connected and the number and length of strings.
- The communication method to the SolarEdge server, if the site is connected.
- The product's software version as it appears in the status screen.

12 Disposal

12.1 Disposal of the charging station

Caution

Please observe the regulations regarding disposal of electric appliances and electronic devices!



- The symbol with the crossed-out waste container means that electrical and electronic devices including their accessories must not be disposed of in the household garbage.
- The materials are recyclable in accordance with their labeling. You can make an important contribution to protecting our environment by reusing, renewing and recycling materials and old appliances.

13 Technical data

13.1 General

Charge mode:	Mode 3 in accordance with IEC 61851-1 AC charging
Overvoltage category:	III in accordance with EN 60664
Protection class:	I
protection type:	IP54
Protection against mechanical impact:	IK10
Rated short-time withstand current:	< 10 kA (effective value in accordance with EN 61439-1)
Residual direct current detecting device (RDC-DD):	> 6 mA (characteristic in accordance with IEC 62955, < 10 s)
Ventilation:	If ventilation is requested by the vehicle, charging will not be started.

13.2 Power supply

Power supply e-series

Rated supply voltage (Europe):	230 V
Internal consumption:	Idling: 2 W, plugged in: 3 W, charging: 5.5 W
Rated current (configurable):	10 A / 13 A / 16 A / 20 A / 25 A / 32 A 1-phase
Line frequency:	50 Hz
Mains forms:	TT / TN / IT

Power supply , b-series, c-series

Rated supply voltage (Europe):	3 x 230 V / 400 V
Internal consumption:	Idling: 3 W, plugged in: 4.5 W, charging: 6.5 W
Rated current (configurable):	10 A / 13 A / 16 A / 20 A / 25 A / 32 A 1-phase or 3-phase
Line frequency:	50 Hz
Mains forms:	TT / TN / IT

Power supply x-series

Rated supply voltage (Europe):	3 x 230 V / 400 V
Internal consumption:	Idling: 4 W, plugged in: 5 W, charging: 7 W
Rated current (configurable):	10 A / 13 A / 16 A / 20 A / 25 A / 32 A 1-phase or 3-phase
Line frequency:	50 Hz
Mains forms:	TT / TN / IT

Power loss

Socket:	20 W at 22 kW
Cable (4 m):	70 W at 22 kW
Cable (6 m):	100 W at 22 kW

Supply terminals

Type:	Spring-type terminal
Cable feed:	Top (surface), back side (flush)
Connection cross-section of the supply:	Minimum cross-section (depending on the cable and the type of installation)
• 16 A rated current:	5 x 2.5 mm ²
• 32 A nominal current:	5 x 6.0 mm ²
Cross section (cable):	0.2 – 10 mm ²
AWG:	24 – 6
Stripping length:	12 mm
Temperature rating:	105 °C

13.3 Socket / cable

Socket variants:	<ul style="list-style-type: none"> • Type 2 standard socket: 32 A / 400 V AC in accordance with EN 62196-1 and VDE-AR-E 2623-2-2 • Type 2 standard socket: 32 A / 400 V AC in accordance with EN 62196-1 and VDE-AR-E 2623-2-2 with Shutter
Cable versions: (For rating, see type plate on the cable)	<ul style="list-style-type: none"> • Type 1 cable: up to 32 A / 230 V AC in accordance with EN 62196-1 and SAE-J1772 • Type 2 cable: up to 32 A / 400 V AC in accordance with EN 62196-1 and VDE-AR-E 2623-2-2

13.4 Ambient conditions

Use:	Inside and outside area
Access limitations at set-up location:	Limited and unlimited access
Installation (stationary):	On the wall or on a floor-mounted column.
Operating temperature:	
• 16 A:	-25 °C to +50 °C (without direct sunlight)
• 32 A:	-25 °C to +40 °C (without direct sunlight)
Storage temperature:	-25 °C to +80 °C
Relative air humidity:	5 % to 95 % (non condensing)
Altitude:	max. 2000 m above sea level
Rate of temperature change:	max. 0.5 °C / min

Temperature behavior:	Automatic power reduction if overheating occurs
-----------------------	---

13.5 Interfaces

Ethernet interface

Ethernet1:	LSA+ [®] terminals
Data transfer rate:	10/100 Mbit/s
Ethernet2:	RJ45 (for debug)

USB interface

Type:	A, USB 2.0 (Hi-Speed)
Max. output power:	500 mA

Enable input

Type:	External, potential-free switch contact
Type of terminal:	Spring-type terminal
Cross section:	0.08 – 4 mm ²
AWG:	28 – 12
Stripping length:	8 mm

Switch contact output

Type:	External safety extra-low voltage, < 50 V AC (50/60 Hz), ≤ 24 V DC
Required current limitation:	< 0.5 A
Terminal type:	Spring-type terminal
Cross section:	0.08 – 4 mm ²
AWG:	28 – 12
Stripping length:	8 mm

13.6 Calibratable energy meter

Meter type:	Electricity meter for active power
Measurement type:	Converter measurement
Non-return device:	Electronic
Minimum current:	0.15 A
Reference current:	3 A
Maximum current:	16 A / 20 A / 32 A
Pulse output in test mode:	10.000 pulses/kWh
Mechanical environmental conditions:	Class M1 (according to MID 2014/32/EU)
Electromagnetic environmental conditions:	Class E2 (according to MID 2014/32/EU)
Limits of the operating temperature for measuring accuracy:	-25 °C to +55 °C

Overflow of the counter:	99.999 kWh
--------------------------	------------

MID

Accuracy class:	Class B (according to EN 50470-1 / -3)
-----------------	--

13.7 Dimensions and weight

Version with standard socket (Type 2)

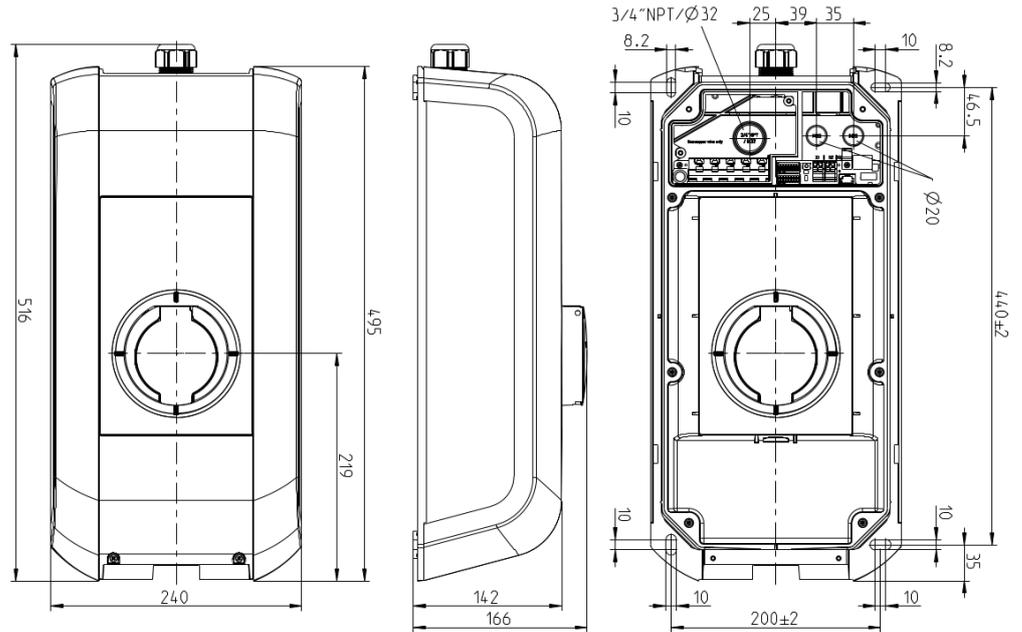


Fig. 13-19: Dimensions in millimeters

Version with charging cable and holder

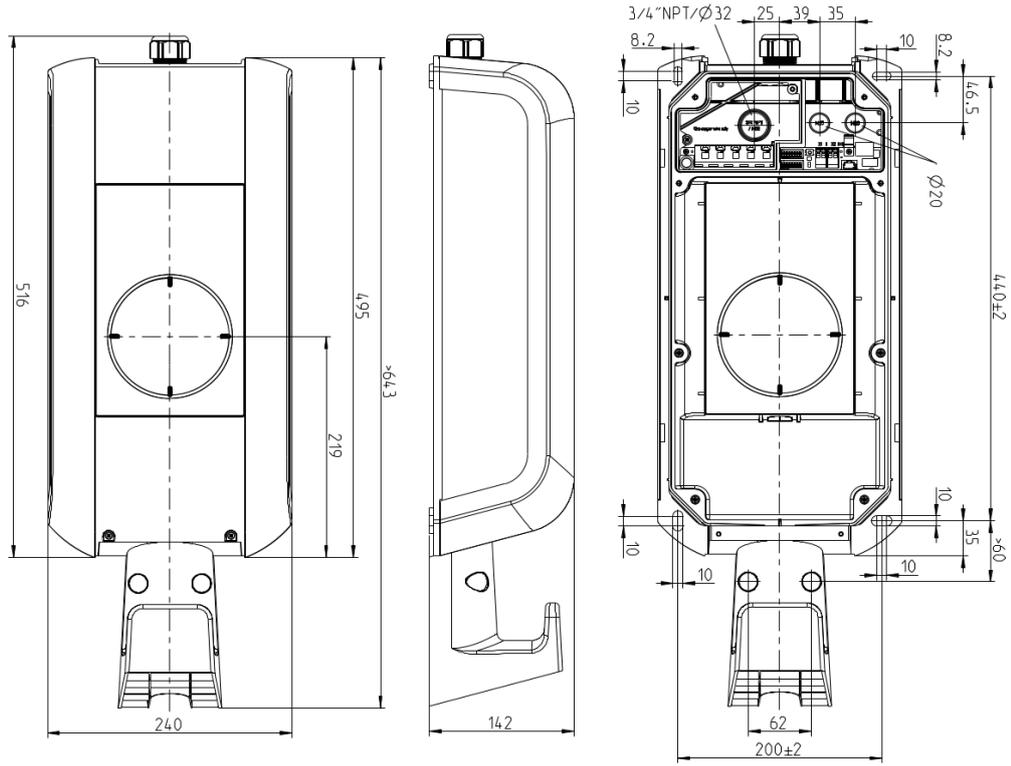


Fig. 13-20: Dimensions in millimeters

14 EU Directives and Standards

2014/35/EU	Low-voltage Directive
2014/30/EU	Electromagnetic Compatibility Directive
2014/53/EU	Radio Equipment Directive (RED)
2011/65/EU	Directive on the restriction of the use of certain hazardous substances (RoHS)
2012/19/EU	Directive for waste electrical and electronic equipment (WEEE)
2014/32/EU	European Measuring Device Directive (MID)

15 Declaration of conformity

SIMPLIFIED EU DECLARATION OF CONFORMITY



KEBA Energy Automation GmbH
 Reindlstraße 51
 4040 Linz
 AUSTRIA

- EN** Hereby, KEBA AG declares that the radio equipment type model (*1) is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet Address: (*2)
- BG** С настоящото KEBA AG декларира, че този тип радиосъоръжение (*1) е в съответствие с Директива 2014/53/ЕС. Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес: (*2)
- CS** Tímto KEBA AG prohlašuje, že typ rádiového zařízení (*1) je v souladu se směrnicí 2014/53/EU. Úplné znění EU prohlášení o shodě je k dispozici na této internetové adrese: (*2)
- DA** Hermed erklærer KEBA AG, at radioudstyrstypen (*1) er i overensstemmelse med direktiv 2014/53/EU. EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse: (*2)
- DE** Hiermit erklart KEBA AG, dass das Gerät mit Funkfunktion (*1) der Richtlinie 2014/53/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: (*2)
- EL** Με την παρούσα ο/η KEBA AG, δηλώνει ότι ο ραδιοεξοπλισμός (*1) πληροί την οδηγία 2014/53/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο: (*2)
- ES** Por la presente, KEBA AG declara que el tipo de equipo radioeléctrico (*1) es conforme con la Directiva 2014/53/UE. El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente: (*2)
- ET** Käesolevaga deklareerib KEBA AG, et käesolev raadioseadme tüüp (*1) vastab direktiivi 2014/53/EL nõuetele. ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil: (*2)
- FI** KEBA AG vakuuttaa, että radiolaitetyypin (*1) on direktiivin 2014/53/EU mukainen. EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa: (*2)
- FR** Le soussigné, KEBA AG, déclare que l'équipement radioélectrique du type (*1) est conforme à la directive 2014/53/UE. Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante: (*2)
- HR** KEBA AG ovime izjavljuje da je radijska oprema tipa (*1) u skladu s Direktivom 2014/53/EU. Cjeloviti tekst EU izjave o sukladnosti dostupan je na sljedećoj internetskoj adresi: (*2)
- HU** KEBA AG igazolja, hogy a (*1) típusú rádióberendezés megfelel a 2014/53/EU irányelvnek. Az EU-megfelelőségi nyilatkozat teljes szövege elérhető a következő internetes címen: 2014.5.22. L 153/104 Az Európai Unió Hivatalos Lapja HU: (*2)
- IT** Il fabbricante, KEBA AG, dichiara che il tipo di apparecchiatura radio (*1) è conforme alla direttiva 2014/53/UE. Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: (*2)
- LT** Aš, KEBA AG, patvirtinu, kad radijo įrenginių tipas (*1) atitinka Direktyvą 2014/53/ES. Visas ES atitikties deklaracijos tekstas prieinamas šiuo interneto adresu: (*2)
- LV** Ar šo KEBA AG deklarē, ka radioiekārta (*1) atbilst Direktīvai 2014/53/ES. Pilns ES atbilstības deklarācijas teksts ir pieejams šādā interneta vietnē: (*2)
- MT** B'dan, KEBA AG, niddikjara li dan it-tip ta' tagħmir tar-radju (*1) huwa konformi mad-Direttiva 2014/53/UE. It-test kollu tad-dikjarazzjoni ta' konformità tal-UE huwa disponibbli f'dan l-indirizz tal-Internet li ġej: (*2)
- NL** Hierbij verklaar ik, KEBA AG, dat het type radioapparatuur (*1) conform is met Richtlijn 2014/53/EU. De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres: (*2)
- PL** KEBA AG niniejszym oświadcza, że typ urządzenia radiowego (*1) jest zgodny z dyrektywą 2014/53/UE. Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym: (*2)

- PT** O(a) abaixo assinado(a) KEBA AG declara que o presente tipo de equipamento de rádio (*1) está em conformidade com a Diretiva 2014/53/UE. O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet: (*2)
- RO** Prin prezenta, KEBA AG declară că tipul de echipamente radio (*1) este în conformitate cu Directiva 2014/53/UE. Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet: (*2)
- SK** KEBA AG týmto vyhlasuje, že rádiové zariadenie typu (*1) je v súlade so smernicou 2014/53/EÚ. Úplné EÚ vyhlásenie o zhode je k dispozícii na tejto internetovej adrese: (*2)
- SL** KEBA AG potrjuje, da je tip radijske opreme (*1) skladen z Direktivo 2014/53/EU. Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: (*2)
- SV** Härmed försäkrar KEBA AG att denna typ av radioutrustning (*1) överensstämmer med direktiv 2014/53/EU. Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress: (*2)

(*1)

Variants												
Form designation system												
Example:	KC-P30-	E	S	2	4	00	0	0-	0	0	0-	xx
	<i>I</i>	<i>II</i>	<i>III</i>	<i>IV</i>	<i>V</i>	<i>VI</i>	<i>VII</i>	<i>VIII</i>	<i>IX</i>	<i>X</i>	<i>XI</i>	<i>XII</i>
<i>I</i>	Basic series			KC-P30	...Device generation (KeContact-P30)							
<i>II</i>	Basic type			E	...Europe							
<i>III</i>	Interface			S	...Socket outlet							
				C	...Charging cable							
<i>IV</i>	Design of interface			1	...Type 1							
				2	...Type 2 acc. EN 62196-2							
				S	...Type 2 with Shutter							
<i>V</i>	Rated current			1	...13 A							
				2	...16 A							
				3	...20 A							
				4	...32 A							
<i>VI</i>	Cable			00	...no cable							
				01	...4 m cable							
				04	...6 m cable							
				07	...5.5 m cable							
<i>VII</i>	Electronics			1	...b-series							
				2	...c-series							
				3	...a-series							
				B	...x-series, WLAN							
				C	...x-series, WLAN, GSM/UMTS							
				E	...x-series, WLAN, LTE							
				H	...x-series, LTE							
<i>VIII</i>	Electrics			1	...1-phase with smooth residual d.c. detection							
				2	...3-phase							
<i>IX</i>	Metering			0	...not equipped							
				E	...Energy meter							
				L	...Calibratable electrical energy meter with national approval for additional device							

Variants		
X	X2 functionality	0 ...Switch contact output
XI	Authorization	0 ...no authorization R ...RFID K ...Key switch
XII	Customer options	xx ...Options for individual customer versions, not relevant for EU Declaration of Conformity

(*2) www.keba.com/emobility-downloads

SolarEdge Technologies
www.solaredge.com

solar  **edge**