


Jinko Solar JKM580N-72HL4-BDV 580Wp (BiFacial) (SFR)

Product code: PV.jinko.sf.ntype.580.bifacial

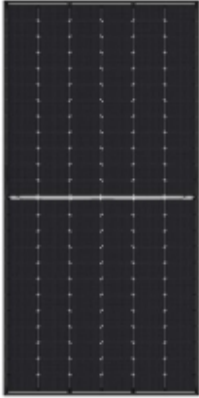

Od ilości:

≥ 36 pcs.

Product prices only visible after login. If you do not have an account, please register.

≥ 360 pcs.

Product prices only visible after login. If you do not have an account, please register.

Key advantages of the Jinko Solar JKM580N-72HL4-BDV module:

- Bifacial design
- SFR technology
- High efficiency
- Lightweight construction

Technical specifications of Jinko Solar JKM580N-72HL4-BDV:

Maximum Power (Pmpp): 580 Wp

Open Circuit Voltage (Voc): 49.9 V

Short Circuit Current (Isc): 11.9 A

Voltage at Pmax (Vmpp): 41.8 V

Current at Pmax (Impp): 13.9 A

Module efficiency: 21.7%

Cell type: Monocrystalline Bifacial

Dimensions: 2278 x 1134 x 30 mm

Weight: 31 kg

Warranty: 12 years on product, 30 years on linear power degradation"}>Jinko Solar JKM580N-72HL4-BDV is a bifacial 580W photovoltaic panel. It is the ideal solution for large photovoltaic installations where reliability and high efficiency are critical.

Product variants

Index

Price

Jinko Solar JKM580N-72HL4-BDV 580Wp (BiFacial) (SFR)
PV.jinko.sf.ntype.580.bifacial

Product prices only visible after login. If you do not have an account, please register.

Product description

Key advantages of the Jinko Solar JKM580N-72HL4-BDV module:

- Bifacial design
- SFR technology
- High efficiency
- Lightweight construction

Technical specifications of Jinko Solar JKM580N-72HL4-BDV:

Maximum Power (Pmpp): 580 Wp

Open Circuit Voltage (Voc): 49.9 V

Short Circuit Current (Isc): 11.9 A

Voltage at Pmax (Vmpp): 41.8 V

Current at Pmax (Impp): 13.9 A

Module efficiency: 21.7%

Cell type: Monocrystalline Bifacial

Dimensions: 2278 x 1134 x 30 mm

Weight: 31 kg

Warranty: 12 years on product, 30 years on linear power degradation"}">Jinko Solar JKM580N-72HL4-BDV is a bifacial 580W photovoltaic panel. It is the ideal solution for large photovoltaic installations where reliability and high efficiency are critical.