


Jinko Solar JKM580N-72HL4-BDV 580Wp (BiFacial) (SFR)

Product code: PV.jinko.sf.ntype.580.bifacial

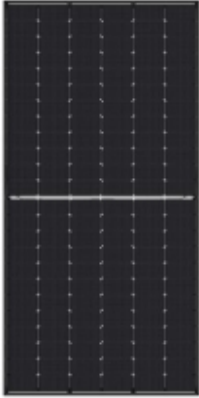

Od ilości:

≥ 2 pcs.

Product prices only visible after login. If you do not have an account, please register.

Jinko Solar JKM580N-72HL4-BDV is a bifacial 580W photovoltaic panel. It is the ideal solution for large photovoltaic installations where reliability and high efficiency are critical.

Key advantages of the Jinko Solar JKM580N-72HL4-BDV module:

- Bifacial design
- SFR technology
- High efficiency
- Lightweight construction

Technical specifications of Jinko Solar JKM580N-72HL4-BDV:

Maximum Power (Pmpp): 580 Wp
Open Circuit Voltage (Voc): 49.9 V
Short Circuit Current (Isc): 11.9 A
Voltage at Pmax (Vmpp): 41.8 V
Current at Pmax (Impp): 13.9 A
Module efficiency: 21.7%
Cell type: Monocrystalline Bifacial
Dimensions: 2285 x 1134 x 35 mm
Weight: 29 kg
Warranty: 12 years on product, 25 years on linear power degradation

Product variants

Index	Price
-------	-------

Jinko Solar JKM580N-72HL4-BDV 580Wp (BiFacial) (SFR)
PV.jinko.sf.ntype.580.bifacial

Product prices only visible after login. If you do not have an account, please register.

Product description

Jinko Solar JKM580N-72HL4-BDV is a bifacial 580W photovoltaic panel. It is the ideal solution for large photovoltaic installations where reliability and high efficiency are critical.

Key advantages of the Jinko Solar JKM580N-72HL4-BDV module:

- Bifacial design
- SFR technology
- High efficiency
- Lightweight construction

Technical specifications of Jinko Solar JKM580N-72HL4-BDV:

Maximum Power (P_{mpp}): 580 Wp

Open Circuit Voltage (V_{oc}): 49.9 V

Short Circuit Current (I_{sc}): 11.9 A

Voltage at P_{max} (V_{mpp}): 41.8 V

Current at P_{max} (I_{mp}): 13.9 A

Module efficiency: 21.7%

Cell type: Monocrystalline Bifacial

Dimensions: 2285 x 1134 x 35 mm

Weight: 29 kg

Warranty: 12 years on product, 25 years on linear power degradation