


## Jinko Solar JKM580N-72HL4-BDV 580Wp (BiFacial) (SFR)

Product code: PV.jinko.sf.ntype.580.bifacial

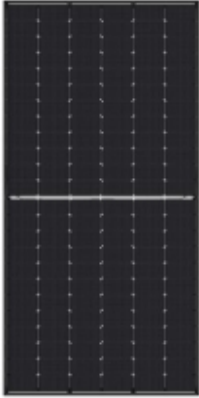

Od ilości:

≥ 2 pcs.

Product prices only visible after login. If you do not have an account, please register.

Jinko Solar JKM580N-72HL4-BDV is a bifacial 580W photovoltaic panel. It is the ideal solution for large photovoltaic installations where reliability and high efficiency are critical.

Key advantages of the Jinko Solar JKM580N-72HL4-BDV module:

- Bifacial design
- SFR technology
- High efficiency
- Lightweight construction

Technical specifications of Jinko Solar JKM580N-72HL4-BDV:

Maximum Power (P<sub>mpp</sub>): 580 Wp  
Open Circuit Voltage (V<sub>oc</sub>): 49.9 V  
Short Circuit Current (I<sub>sc</sub>): 11.9 A  
Voltage at P<sub>max</sub> (V<sub>mpp</sub>): 41.8 V  
Current at P<sub>max</sub> (I<sub>mpp</sub>): 13.9 A  
Module efficiency: 21.7%  
Cell type: Monocrystalline Bifacial  
Dimensions: 2285 x 1134 x 35 mm  
Weight: 29 kg  
Warranty: 12 years on product, 25 years on linear power degradation

## Product variants

Index

Price

**Jinko Solar JKM580N-72HL4-BDV 580Wp (BiFacial) (SFR)**  
**PV.jinko.sf.ntype.580.bifacial**

Product prices only visible after login. If you do not have an account, please register.

## Product description

Jinko Solar JKM580N-72HL4-BDV is a bifacial 580W photovoltaic panel. It is the ideal solution for large photovoltaic installations where reliability and high efficiency are critical.

Key advantages of the Jinko Solar JKM580N-72HL4-BDV module:

- Bifacial design
- SFR technology
- High efficiency
- Lightweight construction

Technical specifications of Jinko Solar JKM580N-72HL4-BDV:

Maximum Power (P<sub>mpp</sub>): 580 Wp

Open Circuit Voltage (V<sub>oc</sub>): 49.9 V

Short Circuit Current (I<sub>sc</sub>): 11.9 A

Voltage at P<sub>max</sub> (V<sub>mpp</sub>): 41.8 V

Current at P<sub>max</sub> (I<sub>mp</sub>): 13.9 A

Module efficiency: 21.7%

Cell type: Monocrystalline Bifacial

Dimensions: 2285 x 1134 x 35 mm

Weight: 29 kg

Warranty: 12 years on product, 25 years on linear power degradation