


## Trina Solar NEG18R.28 Vertex S+ 500W BF

Product code: PV.trina.bf.S+.500

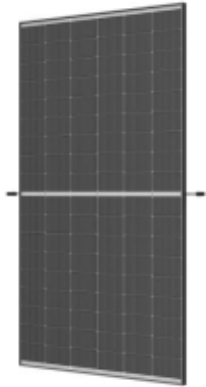

### Od ilości:

≥ 36 pcs.

Product prices only visible after login. If you do not have an account, please register.

≥ 360 pcs.

Product prices only visible after login. If you do not have an account, please register.

Trina Solar NEG18R.28 Vertex S+ is a 500W bifacial photovoltaic panel offering excellent energy efficiency by generating power from both sides of the module. It is the perfect solution for large photovoltaic installations requiring maximum efficiency and reliability.

Key advantages of the Trina Solar NEG18R.28 Vertex S+ module:

- Bifacial design
- High efficiency
- Elegant appearance
- Low power degradation

Technical specifications of Trina Solar NEG18R.28 Vertex S+:

Maximum Power (Pmpp): 500 Wp

Open Circuit Voltage (Voc): 49.0 V

Short Circuit Current (Isc): 11.5 A

Voltage at Pmax (Vmpp): 41.0 V

Current at Pmax (Impp): 12.2 A

Module efficiency: 21.3%

Cell type: Monocrystalline Bifacial

Dimensions: 2285 x 1134 x 35 mm

Weight: 29 kg

Warranty: 12 years on product, 25 years on linear power degradation

## Product variants

Index	Price
-------	-------

**Trina Solar NEG18R.28 Vertex S+ 500W BF**  
**PV.trina.bf.S+.500**

Product prices only visible after login. If you do not have an account, please register.

## Product description

Trina Solar NEG18R.28 Vertex S+ is a 500W bifacial photovoltaic panel offering excellent energy efficiency by generating power from both sides of the module. It is the perfect solution for large photovoltaic installations requiring maximum efficiency and reliability.

Key advantages of the Trina Solar NEG18R.28 Vertex S+ module:

- Bifacial design
- High efficiency
- Elegant appearance
- Low power degradation

Technical specifications of Trina Solar NEG18R.28 Vertex S+:

Maximum Power (Pmpp): 500 Wp

Open Circuit Voltage (Voc): 49.0 V

Short Circuit Current (Isc): 11.5 A

Voltage at Pmax (Vmpp): 41.0 V

Current at Pmax (Impp): 12.2 A

Module efficiency: 21.3%

Cell type: Monocrystalline Bifacial

Dimensions: 2285 x 1134 x 35 mm

Weight: 29 kg

Warranty: 12 years on product, 25 years on linear power degradation