




Items	Unit	9000BTU	12000BTU	18000BTU	24000BTU
Tryb		DWGA21-ACDCBLW-09KR2(EU)	DGWA21-ACDCBLW-12KR2(EU)	DGWA5-ACDCBLW-18KR2(EU)	DGWA6-ACDCBLW-24KR2(EU)
Napięcie energii słonecznej	V	80~380	80~380	80~380	80~380
Napięcie mocy sieci	V/Hz	208V~240V/50~60Hz	208V~240V/50~60Hz	208V~240V/50~60Hz	208V~240V/50~60Hz
Pojemność chłodzenia (T1)	W	2700(800-3500)	3500(800~3900)	5010(1300~5850)	6400(1800~7800)
Wejście mocy chłodzącej (T1)	W	620(150-1000)	860(150~1100)	1250(220~1670)	1690(340~2550)
Wydajność grzewcza	W	3100(900-4000)	3500(900~4200)	5010(1300~5200)	7030(1800~7800)
Wejście mocy grzewczej	W	680(150-1150)	870(150~1200)	1200(220~1420)	1780(320~2190)
EER	W/W	4.35/14.50	3.70/12.50	3.60/12.25	3.60/12.25
Wymiar jednostki wewnętrznej (WxHxD)	mm	840x205x295	840x205x295	1080x330x237	1080x330x237
Pakowanie jednostek wewnętrznych (WxHxD)	mm	920x290x360	920x290x360	1140x300x382	1140x362x300
Wymiar jednostki zewnętrznej (WxHxD)	mm	802x564x323	802x564x323	802x564x323	900x700x337
Zewnętrzne opakowanie (WxHxD)	mm	910x622x405	910x622x405	910x622x405	1006x755x418



605117
KOD AKCJI

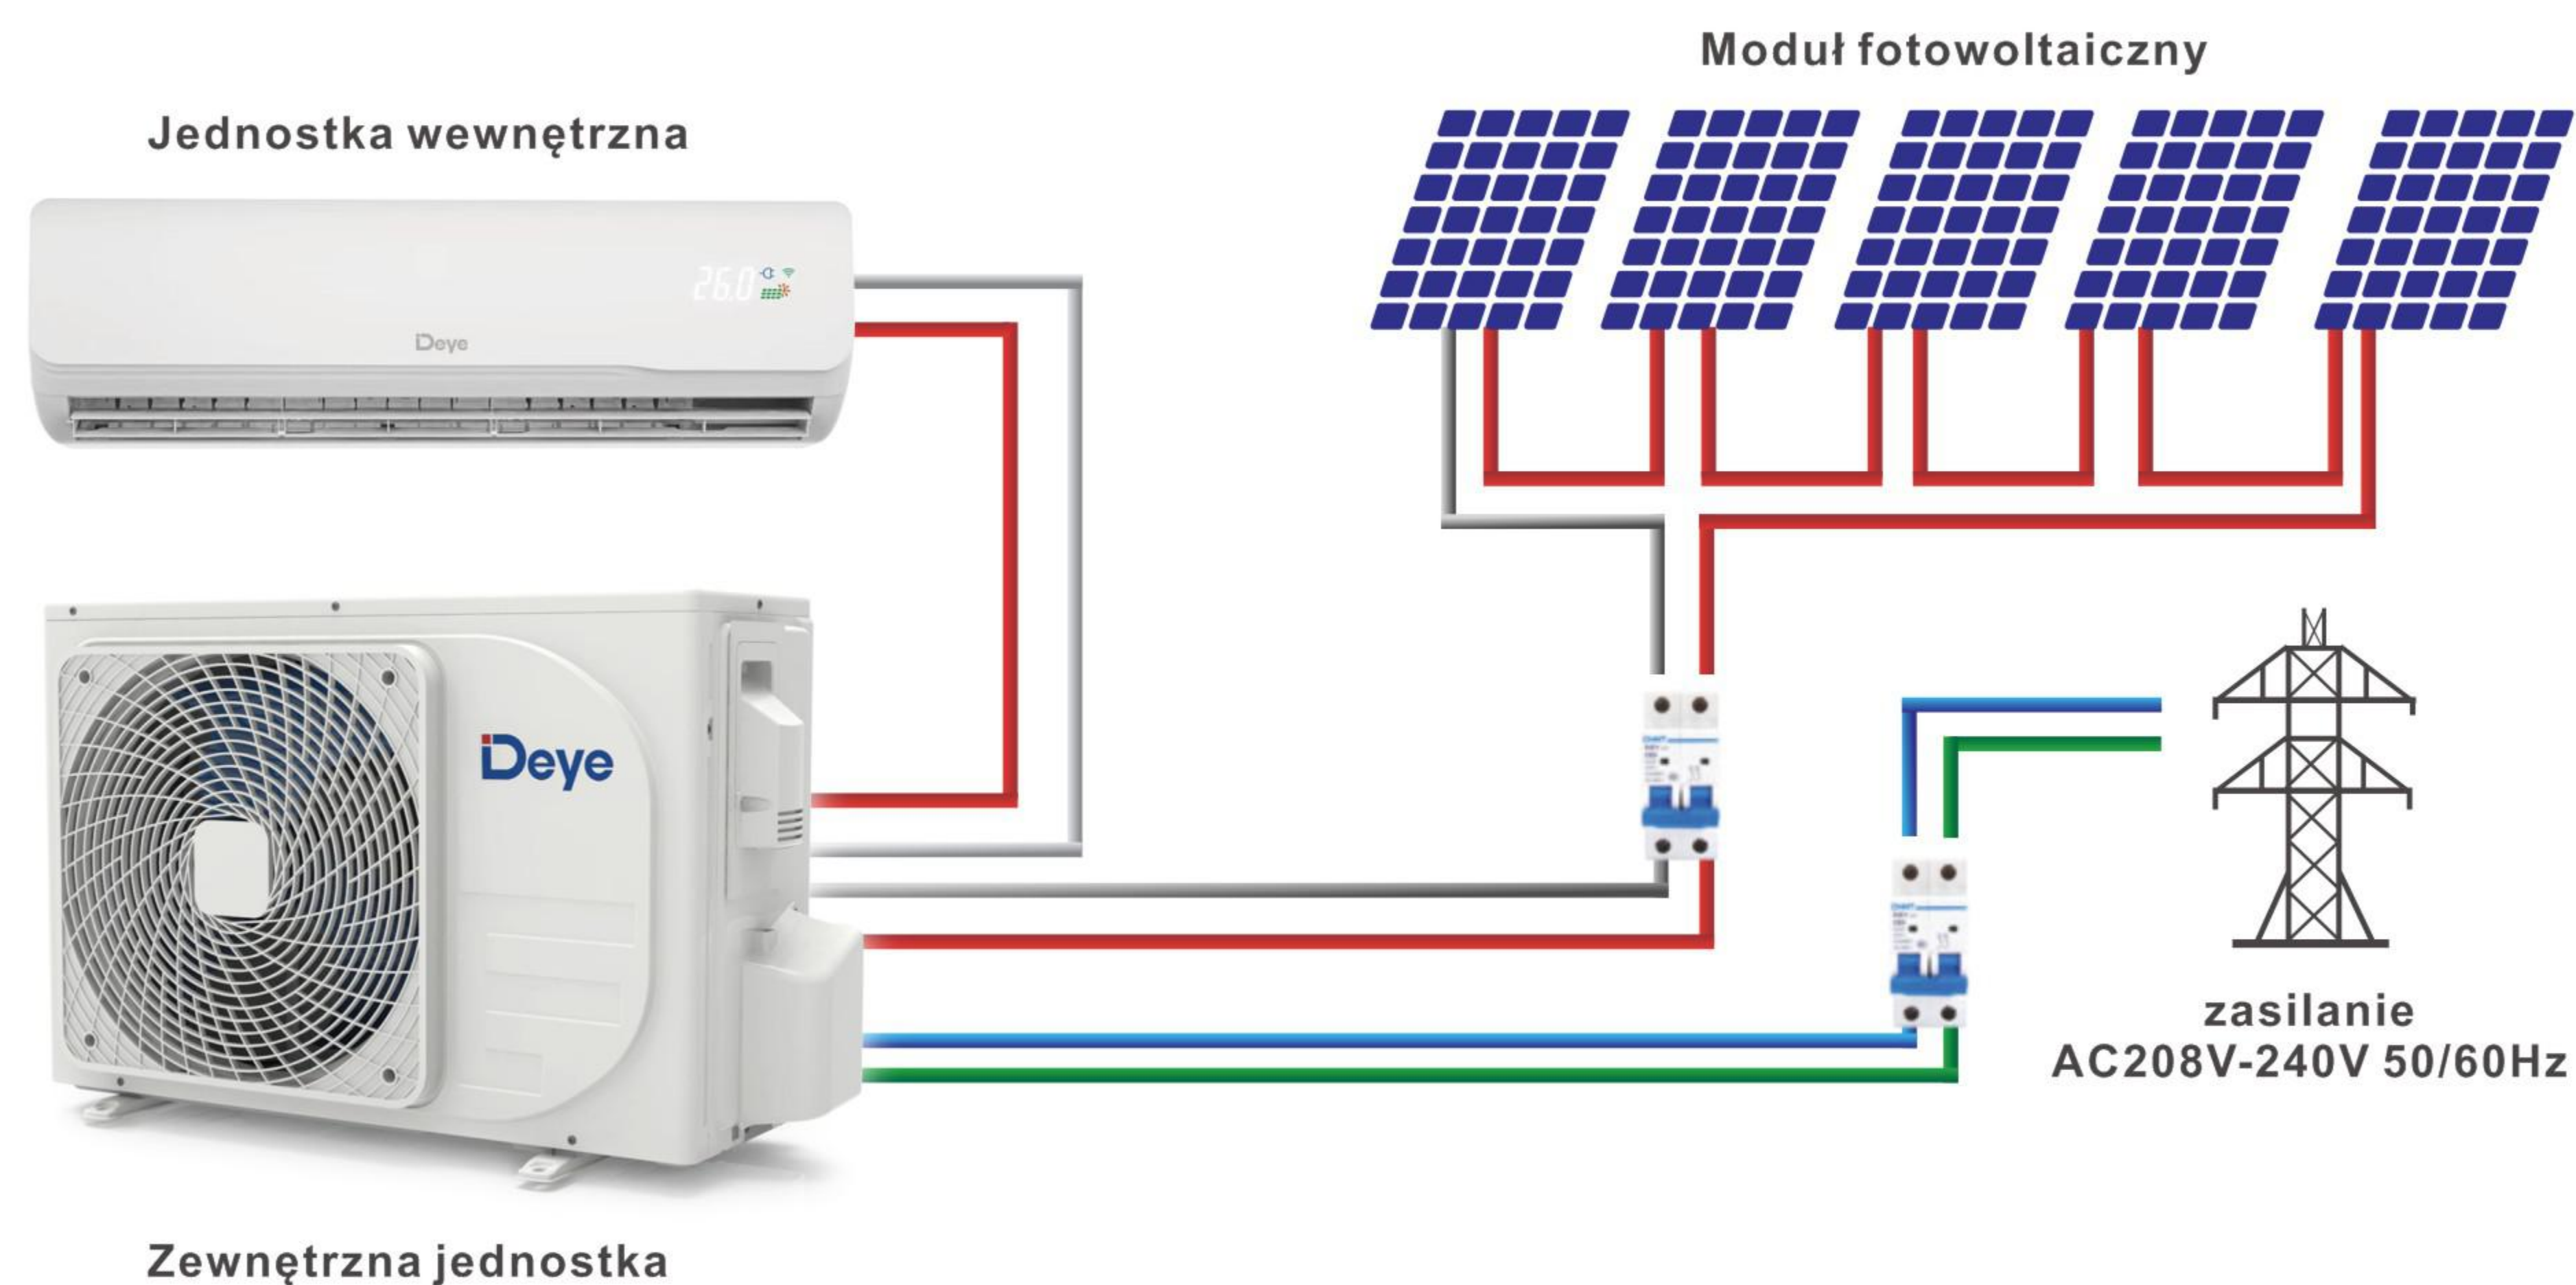

Pełna technologia
przetwornika stałego



MPPT



Hybrid Solar

Słoneczna kaseeta AC

